




AA12038AW SERIES

External Dimensions

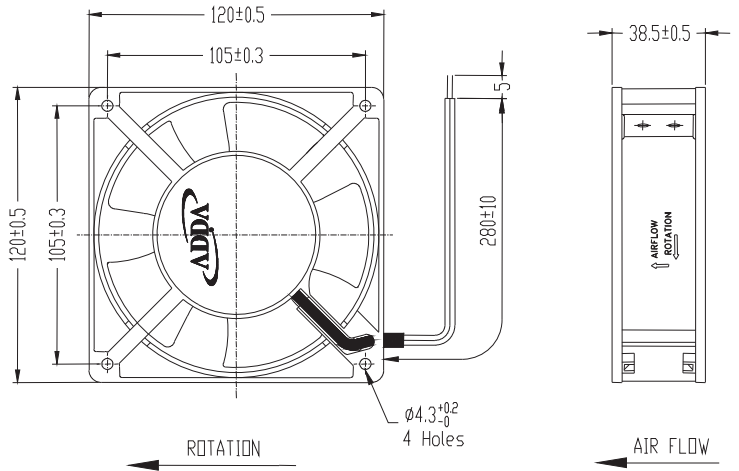

Frame: Aluminum Alloy
 Impeller: Plastic (UL:94V-0)
 Bearing: Ball bearing
 Lead wire: UL1430AWG22
 OPERATING TEMP*: -10C~70C
 *: -10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)


*: Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing


Frame size (mm)	Model No.	Bearing System Type	Volt./Freq. (VAC/Hz)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	*Noise Level (dB/A)	Weight (g)
120x120x38.5	AA1281UB-AW	◎ ※ ●	115/50	0.26	34.16	2400	2.771	97.9	0.247	6.976	46.4	550
			115/60	0.23	28.87	2600	3.042	107.5	0.251	6.365	48.1	
	AA1282UB-AW	◎ ※ ●	230/50	0.14	31.97	2400	2.748	97.0	0.245	6.218	46.4	
			230/60	0.12	27.14	2600	3.032	107.0	0.248	6.308	48.1	

Specifications subject to change without notice.

50Hz

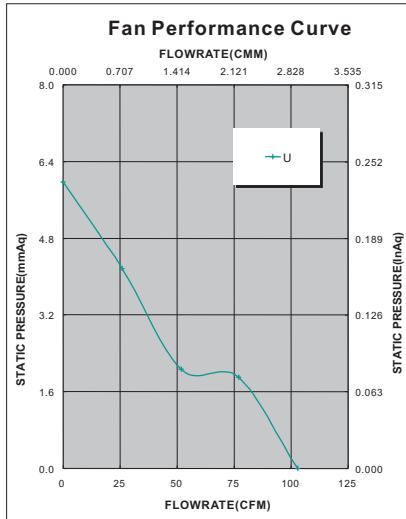

60Hz

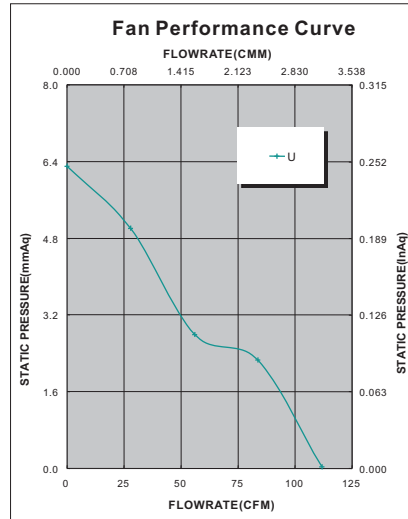

*Safety approvals

✓	✓		✓	✓